




**ACME ENGINEERING &
MANUFACTURING CORP.**
P.O. Box 978
Muskogee, OK 74402
Phone: 918/682-7791
Fax: 918-682-0134
www.acmefan.com

Heavy Duty Exhaust Fan Model OFH

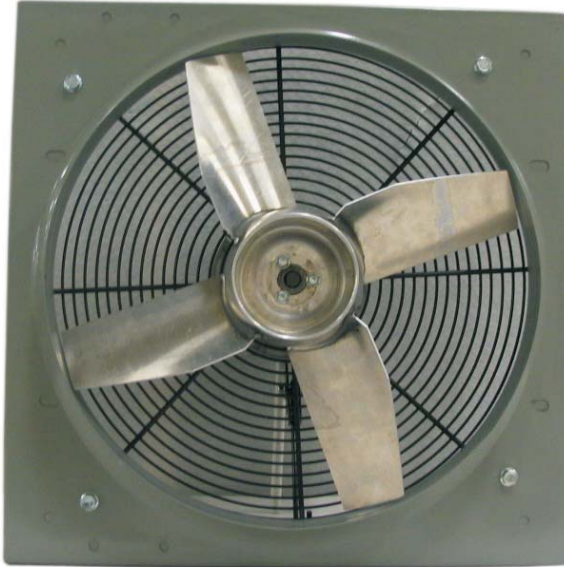

Designed for general ventilation. These exhaust fans have aluminum blade propellers and wire guards with baked-on gray polyester finish for corrosion resistance.

- Totally enclosed, 1725 RPM, 115V, 60 Hz, split phase motor
- Not speed controllable.

Performance

Model	Propeller Dia. (In.)	CFM Air Delivery					Motor RPM	HP	Watts	Sones 5 Ft. .000" SP
		0.0"	0.125"	0.250"	0.375"	0.500"				
OFH12E	12	1275	1160	1000	755	460	1725	1/4	210	13.3
OFH16E	16	2657	2430	1960	1400	1150	1725	1/4	365	17.4
OFH18E	18	2792	2495	2110	1725	1320	1725	1/4	330	17.9
OFH20E	20	2935	2640	2340	1990	1580	1725	1/4	366	23
OFH20F	20	3558	3290	2905	2520	2050	1725	1/3	410	22
OFH20G	20	4169	3860	3570	3130	2620	1725	1/2	540	21
OFH24F	24	3710	3255	2750	2240	1655	1725	1/3	370	28
OFH24G	24	5180	4700	4150	3610	2920	1725	1/2	600	26

Performance shown is for installation Type A, Free Inlet, Free Outlet. Speed (RPM) shown is nominal. Performance is based on actual speed of test. Performance ratings include the effects of guard in the airstream. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5m) in a hemispherical-free calculated per AMCA Standard 301. Values shown are for installation Type A, Free Inlet and Fan sone levels.



Acme Engineering & Manufacturing Corporation certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



U.L. 705 Listed

Consult your Acme representative for availability.

